



PCT/GB 2003 / 003081



INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8Q

REC'D 20 AUG 2003

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

Am. Brewer

Dated

6 August 2003

BEST AVAILABLE COPY

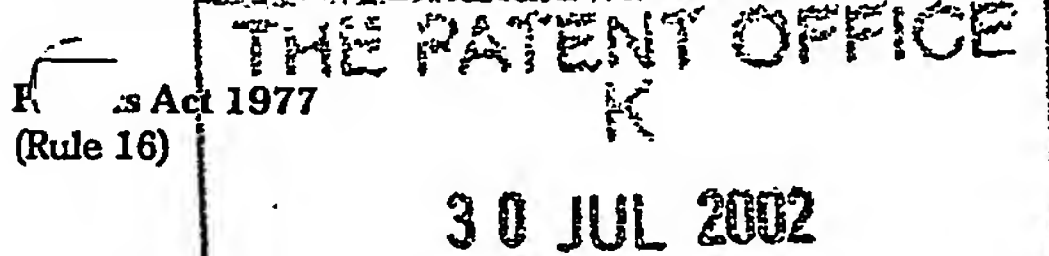

The
Patent
Office

30JUL02 E737008-1 D02887
P01/7700 0.00-0217538.8

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference XA1669

2. Patent application number 0217538.8
(The Patent Office will fill in this part) 30 JUL 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames) MBDA UK Limited

Six Hills Way, Stevenage,
Hertfordshire, SG1 2DA

Patents ADP number (If you know it)

If the applicant is a corporate body, give the country/state of its incorporation

08339350001✓

United Kingdom

4. Title of the invention AN OPTICAL FIBRE

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

BAE SYSTEMS plc
Group IP Department
Lancaster House, P.O. Box 87
Farnborough Aerospace Centre
Farnborough, Hampshire, GU14 6YU

Patents ADP number (If you know it)

07914674002 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 08 ✓

Claim(s) 02 ✓

Abstract 01 ✓

Drawing(s) 04 + 4 RW

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1 ✓

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

Fee sheet ✓

11.

I/We request the grant of a patent on the basis of this application.

Signature

D. Lewis

Date

29 July 2002

Debra Lewis

12. Name and daytime telephone number of person to contact in the United Kingdom

Debra Lewis - 01252 384633

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.

b) Write your answers in capital letters using black ink or you may type them.

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

AN OPTICAL FIBRE

The present invention relates to optical fibres and particularly though not exclusively to fibre-optic apparatus for detecting electromagnetic radiation.

5 Arrays of fibre optic cables are often used in electromagnetic radiation detectors. Each fibre has one exposed end so that electromagnetic radiation travelling from the direction in which the exposed fibre end is pointing passes into the fibre and then travels along its length. At the other end of the fibre is a sensor which may detect, for example, the wavelength or intensity of particular
10 bandwidths of electromagnetic radiation, depending upon the desired application, e.g. infra-red detectors, visible detectors etc. Such detectors are directional in that each fibre is only able to detect radiation approaching from the general direction in which the fibre is pointing.

15 Therefore it is desirable and usual to have numerous fibres arranged in an array, so that a greater number of directions may be covered by a detector.

 Conventional optical fibres comprise a central fibre core surrounded by cladding. Conventional fibre optic arrays comprise a number of clad fibres. The fibres are arranged in a matrix form to create the array, with each fibre being placed as physically close as possible to neighbouring fibres. This permits the
20 amount of 'dead space', which is the space on the array where radiation cannot be guided into a fibre, to be minimised.

 A disadvantage of the known fibre optic arrays is that, due to the cladding, the fibre cores are spaced relatively far apart. Therefore a significant proportion of the array is 'dead space'.

25 This is a particular problem where relatively weak electromagnetic radiation needs to be detected. For example, a missile may carry a small lightweight and therefore relatively weak laser on board for illuminating targets. The missile may also carry an electromagnetic radiation detector comprising arrays for receiving the electro-magnetic radiation reflected from the target.
30 Because the laser used to illuminate the target is relatively weak, the reflected

signals will be very weak, and therefore it is desirable that as much returned radiation as possible is captured by the fibres of the array.

According to the present invention there is provided an optical fibre core having a reflective coating along a first part of its length such that
5 electromagnetic radiation may travel along the first part of the optical fibre by means of reflection, and further having a cladding along a second part of its length, the cladding having a refractive index suitable for permitting the electromagnetic radiation to travel along the second part of the optical fibre.

The reflective coating is preferably a metallic coating. Alternatively a
10 reflective polymer material or a semiconductor material may be used instead. As the reflective coating only needs to be a very thin layer of approximately 100nm, the coated fibres are significantly thinner than the conventional optical fibres previously described. Therefore, the coated fibres can be packed more densely than the conventional optical fibres, thus significantly reducing the
15 'dead space' on the optical fibre array.

In some circumstances during manufacture, eg during drawing of fibres, a thin layer of cladding may remain on the fibre core. In such circumstances it may be necessary to provide a reflective coating on the outer surface of the cladding to ensure that the electromagnetic radiation may still travel along the
20 first part of the optical fibre by means of reflection.

Preferably at least part of the outside surface of the cladding is coated in a reflective coating. The reflective coating is advantageously present in the
region close to said first part of the fibre. This helps to prevent losses of electromagnetic radiation in the region where the first, coated part of the fibre
25 and the second, clad part of the fibre meet.

The cladding may be tapered along part of its length, the thin part of the taper being adjacent the first, coated part of the fibre.

Advantageously, the tapered portion of the cladding has a reflective coating on the outside surface of the cladding. The reflective coating may be
30 thickest at the thin part of the taper.

The first part of the optical fibre may have a core of a different cross-section to the second part of the optical fibre. The core advantageously tapers to a larger cross-section in the second part of the optical fibre. The first part of the optical fibre may additionally or alternatively have a core of different cross-sectional shape to the second part of the optical fibre. The first part of the optical fibre may additionally or alternatively have a core of a different material to the second part of the optical fibre.

According to the present invention in another aspect thereof, there is provided a fibre optic coupling arrangement for coupling a light pipe to a clad optical fibre, the coupling arrangement comprising a light pipe comprising an optical fibre core having a reflective coating and a clad optical fibre comprising an optical fibre core with cladding surrounding the core, the optical fibre core of the light pipe being optically joined to the optical fibre core of the clad optical fibre such that electromagnetic radiation is able to travel from the light pipe to the clad optical fibre, wherein tapered cladding is provided in the region where the light pipe is optically joined to the clad optical fibre.

The length and shape of the taper may be designed to encourage the electromagnetic radiation to propagate in a desired mode.

Advantageously, the tapered cladding is at least partially coated with a reflective coating. It is particularly advantageous to coat the thinnest region of the tapered cladding with the reflective coating to prevent loss of radiation.

According to the present invention in another aspect thereof, there is provided an array of optical fibres, each optical fibre comprising an optical fibre core having a reflective coating along a first part of its length such that electromagnetic radiation may travel along the first part of the optical fibre by means of reflection, and further having a cladding along a second part of its length, the cladding having a refractive index suitable for permitting the electromagnetic radiation to travel along the second part of the optical fibre.

The clad part of each of the optical fibres may terminate, for example, in an electromagnetic radiation detection device.

The present invention will now be described by way of example only and with reference to the following drawings:

Figure 1 shows a front view of the end of a conventional clad optical fibre.

5 Figure 2 shows a front view of a conventional optical fibre array.

Figure 3 shows a front view of an optical fibre array in accordance with the present invention.

Figure 4 shows a longitudinal cross-sectional view of part of an optical fibre of the array of Figure 3.

10 Figure 5 shows a longitudinal cross-sectional view of an optical fibre in accordance with the present invention in a first embodiment thereof.

Figure 6 shows a longitudinal cross-sectional view of an optical fibre of a second embodiment.

15 Figure 7 shows a longitudinal cross-sectional view of an optical fibre of a third embodiment.

Figure 8 shows a longitudinal cross-sectional view of an optical fibre of a fourth embodiment.

Figure 9 shows a longitudinal cross-sectional view of an optical fibre of a fifth embodiment.

20 Figure 10 shows a longitudinal cross-sectional view of an optical fibre of a sixth embodiment.

Figure 1 shows an optical fibre arrangement 1 comprising an optical fibre core 3 which is clad in a cladding material 5. The cladding material 5 has an appropriate refractive index so that radiation incident on the exposed end of fibre core 3 travels along fibre 1 by means of one or more guided modes. Some radiation incident on the cladding 7 adjacent to the fibre core 3 may be coupled into a guided mode. Radiation falling on the outer part of the cladding 9 will not become a guided mode, and will not propagate along the fibre 1.

25

Figure 2 shows a fibre optic array 11 comprising several optical fibres 1 as described with reference to Figure 1. The optical fibres 1 are packed together as tightly as possible. Any electro-magnetic radiation falling on the array has to fall either on the end of the fibre core 3 or the inner part of the cladding 7 to be able to travel along the fibre 1 and therefore be detected. It can be seen that there is a large area of the array which cannot be used for detecting radiation, namely the area 13 between optical fibres 1, and the area of the outer part of the cladding 9 of the optical fibres 1. The 'dead-space' (non-detecting) areas are 9 and 13.

Figure 3 shows an optical fibre array 15, which comprises several optical fibres 17. Each optical fibre 17 has a reflective coating 19 around the fibre core 21. The reflective coating 19 is very much thinner than the cladding, (typically 2-3 orders of magnitude) and allows electromagnetic radiation to travel along the fibre core 21 by reflection off the reflective coating.

As the reflective coating is significantly thinner than the cladding, a greater number of optical fibres 17 can be put in an area of the same size relative to the optical fibres 1 of Figures 1 and 2.

This means that the ratio of non-detecting areas 19 (reflective coating) and 23 (area between the optical fibres 17) to detecting areas 21 is much lower than for the conventional array 11. As more of the radiation falling upon the array is received by the optical fibres 17 than for the conventional array 11, more radiation reaches the sensor part of the detector. Therefore for weak sources of radiation, there is more chance of detection.

Figure 4 shows the optical fibre 17. The path 25 of radiation travelling from the exposed end of the fibre 21 towards the sensor part of the detector (not shown) is shown. The radiation is reflected by the reflective coating 19.

Figure 5 shows an optical fibre 27 comprising a fibre core 29 having an exposed end 31. The part of the fibre core 29 adjacent the exposed end 31 is coated in a reflective material 33. The rest of the fibre core 29 is clad in a cladding material 35, which has an appropriate refractive index. This design of optical fibre allows the exposed ends 31 of a plurality of optical fibres 27 to be

packed tightly together into an array such as that described with reference to Figure 3 whilst allowing the rest of the optical fibre to be a conventional fibre waveguide. This is advantageous as such waveguides are readily available, and relatively inexpensive, compared with rare metal light pipes.

5 Figure 6 shows an optical fibre 37 comprising a fibre core 39 having an exposed end 41. The part of the fibre core 39 adjacent the exposed end 41 is coated in the reflective material 33. The rest of the fibre core 39 is clad in the cladding material 35. The cladding material 35 is tapered adjacent to the reflectively-coated part of the optical fibre, and the tapered outside surface 47 of
10 the cladding 35 is coated in a reflective material 49 which may be the same as reflective material 33. The reflective coating 49 prevents radiation being lost through the relatively thin cladding at the taper 47. Any radiation which reaches the outside surface 47 of the cladding is reflected back into the cladding 35. The reflective coating 49 may be of constant thickness along the length of the
15 taper 47, or may instead decrease in thickness as the thickness of cladding 35 increases along the taper 47, as shown in Figure 6. The taper 47 encourages radiation to propagate in desired modes. In this example, the fibre core 39 is shown increasing in cross-section in the region of the taper 47, however, the fibre core 39 may retain the same cross-section throughout the tapered region if
20 desired.

Figure 7 shows an optical fibre 51 comprising a fibre core 53 having an exposed end 55. The part of the fibre core 53 adjacent the exposed end 55 is coated in the reflective material 33. ~~The rest of the fibre 53 is clad in the~~
cladding material 35. The cladding material this time is not tapered adjacent the
25 reflectively-coated part of the optical fibre, however the end face of the cladding 57 is coated in a reflective material 59 which may be the same as reflective material 33.

Figure 8 shows an optical fibre 65 comprising a fibre core 63 having an exposed end 61. The fibre is clad along its length, the cladding 35 being
30 significantly thinner near the exposed end 61 of the optical fibre 65, and being tapered 69. A coating of reflective material 67 is applied to the outer surface of the cladding in the region where the cladding is thinnest (i.e. between the

exposed end of the fibre 61 and the taper 69). This allows radiation to propagate along the fibre in the region of the exposed fibre end 61 by means of reflection provided that the cladding is sufficiently thin.

Figure 9 shows an optical fibre 73 comprising a fibre core 75, 77 having
5 an exposed end 71. The part of the fibre core 75 adjacent the exposed end 71
is coated in the reflective material 79. The rest of the fibre core 77 is clad in the
cladding material 35. The cladding material 35 is tapered adjacent to the
reflectively-coated part of the optical fibre, and the tapered outside surface 81 of
the cladding 35 is coated in the reflective material 79. The reflective coating 79
10 prevents radiation being lost through the relatively thin cladding at the taper 81.
Any radiation which reaches the tapered outside surface 81 of the cladding 35
is reflected back into the cladding 35. The reflective coating 79 may be of
constant thickness along the length of the taper 81, as shown in Figure 9, or
may instead decrease in thickness as the thickness of cladding 35 increases
15 along the taper 81 (as shown in Figure 6). The taper 81 encourages radiation
to propagate in desired modes. In this example, the fibre core 75, 77 is formed
from two different materials, the materials joining in the region of the taper 81,
and the fibre core 75, 77 being designed to allow radiation to propagate along
its length without significant losses in the region of the taper 81. This allows
20 one material to be used as a lightpipe, and a different material to be used as a
fibre core in the clad fibre, where different modes of propagation are required.
In this example, the fibre core 75, 77 is shown to retain the same cross-section
throughout the region of the taper 81.

Figure 10 shows an optical fibre 83 having similar characteristics to the
25 optical fibre 73 of Figure 9, similar features having the same reference numerals
as in Figure 9. However, in this example the fibre core 75, 77 is shown to
increase in cross-section in the region of the taper 81. The shape and size of
the taper is chosen to encourage propagation of the radiation along the fibre
core 77 in the desired modes.

30 It will be apparent to one skilled in the art that different embodiments of
the present invention are possible, several of which are described herein. The

- 8 -

scope of the invention covers the embodiments which utilise the same principles as those described herein.

CLAIMS

1. An optical fibre core having a reflective coating along a first part of its length such that electromagnetic radiation may travel along the first part of the optical fibre by means of reflection, and further having a cladding along a second part of its length, the cladding having a refractive index suitable for permitting the electromagnetic radiation to travel along the second part of the optical fibre.
2. An optical fibre core as claimed in claim 1 wherein at least part of the outside surface of the cladding is coated in a reflective coating.
3. An optical fibre core as claimed in claim 1 or claim 2 wherein the cladding is tapered along part of its length, the thin part of the taper being adjacent the first, coated part of the fibre.
4. An optical fibre core as claimed in claim 3 wherein the tapered portion of the cladding has a reflective coating on the outside surface of the cladding.
5. An optical fibre core as claimed in claim 4 wherein the reflective coating is thickest at the thin part of the taper.
6. An optical fibre core as claimed in any preceding claim wherein the first, coated part of the fibre core further comprises a layer of cladding between the fibre core and the reflective coating, said layer of cladding being substantially thinner than the cladding of the second part of the optical fibre core, said layer of cladding being sufficiently thin to permit electromagnetic radiation to travel along the first part of the optical fibre core by means of reflection.
7. An optical fibre core as claimed in any preceding claim wherein the first part of the optical fibre has a core of a different cross-section to the second part of the optical fibre.

8. An optical fibre core as claimed in any preceding claim wherein the first part of the optical fibre has a core of a different material to the second part of the optical fibre.
- 5 9. A fibre optic coupling arrangement for coupling a light pipe to a clad optical fibre, the coupling arrangement comprising a light pipe comprising an optical fibre core having a reflective coating and a clad optical fibre comprising an optical fibre core with cladding surrounding the core, the optical fibre core of the light pipe being optically joined to the optical fibre core of the clad optical fibre such that electromagnetic radiation is able to travel from the light pipe to the clad optical fibre, wherein tapered cladding is provided in the region where the light pipe is optically joined to the clad optical fibre.
- 10 10. A fibre optic coupling arrangement as claimed in claim 9 wherein the tapered cladding is at least partially coated with a reflective coating.
- 15 11. An array of optical fibres, each optical fibre comprising an optical fibre core having a reflective coating along a first part of its length such that electromagnetic radiation may travel along the first part of the optical fibre by means of reflection, and further having a cladding along a second part of its length, the cladding having a refractive index suitable for permitting the electromagnetic radiation to travel along the second part of the optical fibre.
- 20 12. An array of optical fibres as claimed in claim 11 wherein the clad part of each of the optical fibres terminates in an electromagnetic radiation detection device.
-

ABSTRACT

An optical fibre core having a reflective coating along a first part of its length such that electromagnetic radiation may travel along the first part of the optical
5 fibre by means of reflection, and further having a cladding along a second part of its length, the cladding having a refractive index suitable for permitting the electromagnetic radiation to travel along the second part of the optical fibre. The invention also provides a fibre optic coupling arrangement for coupling a light pipe to a clad optical fibre, the coupling arrangement comprising a light
10 pipe comprising an optical fibre core having a reflective coating and a clad optical fibre comprising an optical fibre core with cladding surrounding the core, the optical fibre core of the light pipe being optically joined to the optical fibre core of the clad optical fibre such that electromagnetic radiation is able to travel from the light pipe to the clad optical fibre, wherein tapered cladding is provided
15 in the region where the light pipe is optically joined to the clad optical fibre.

Figure 1

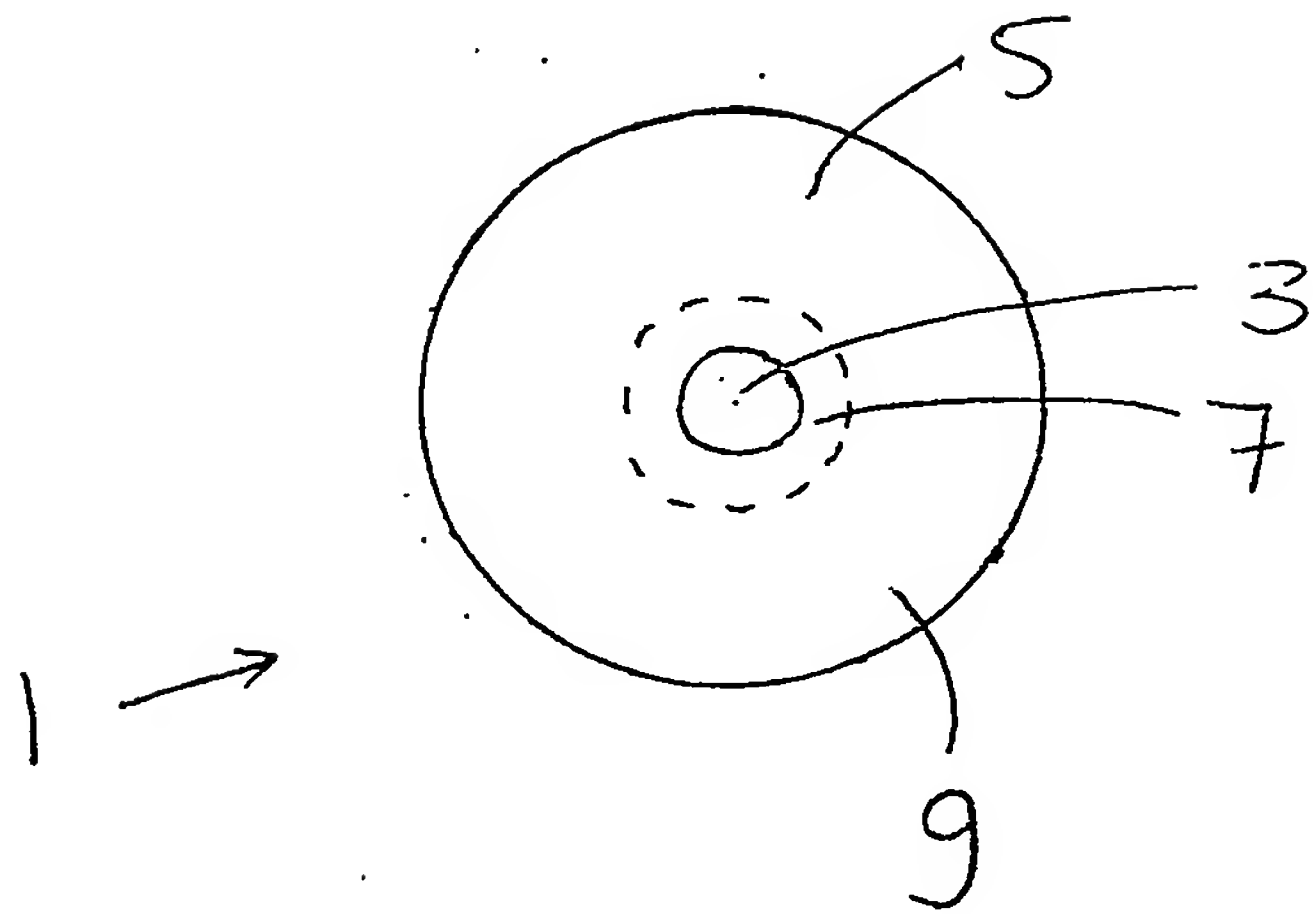


Figure 2

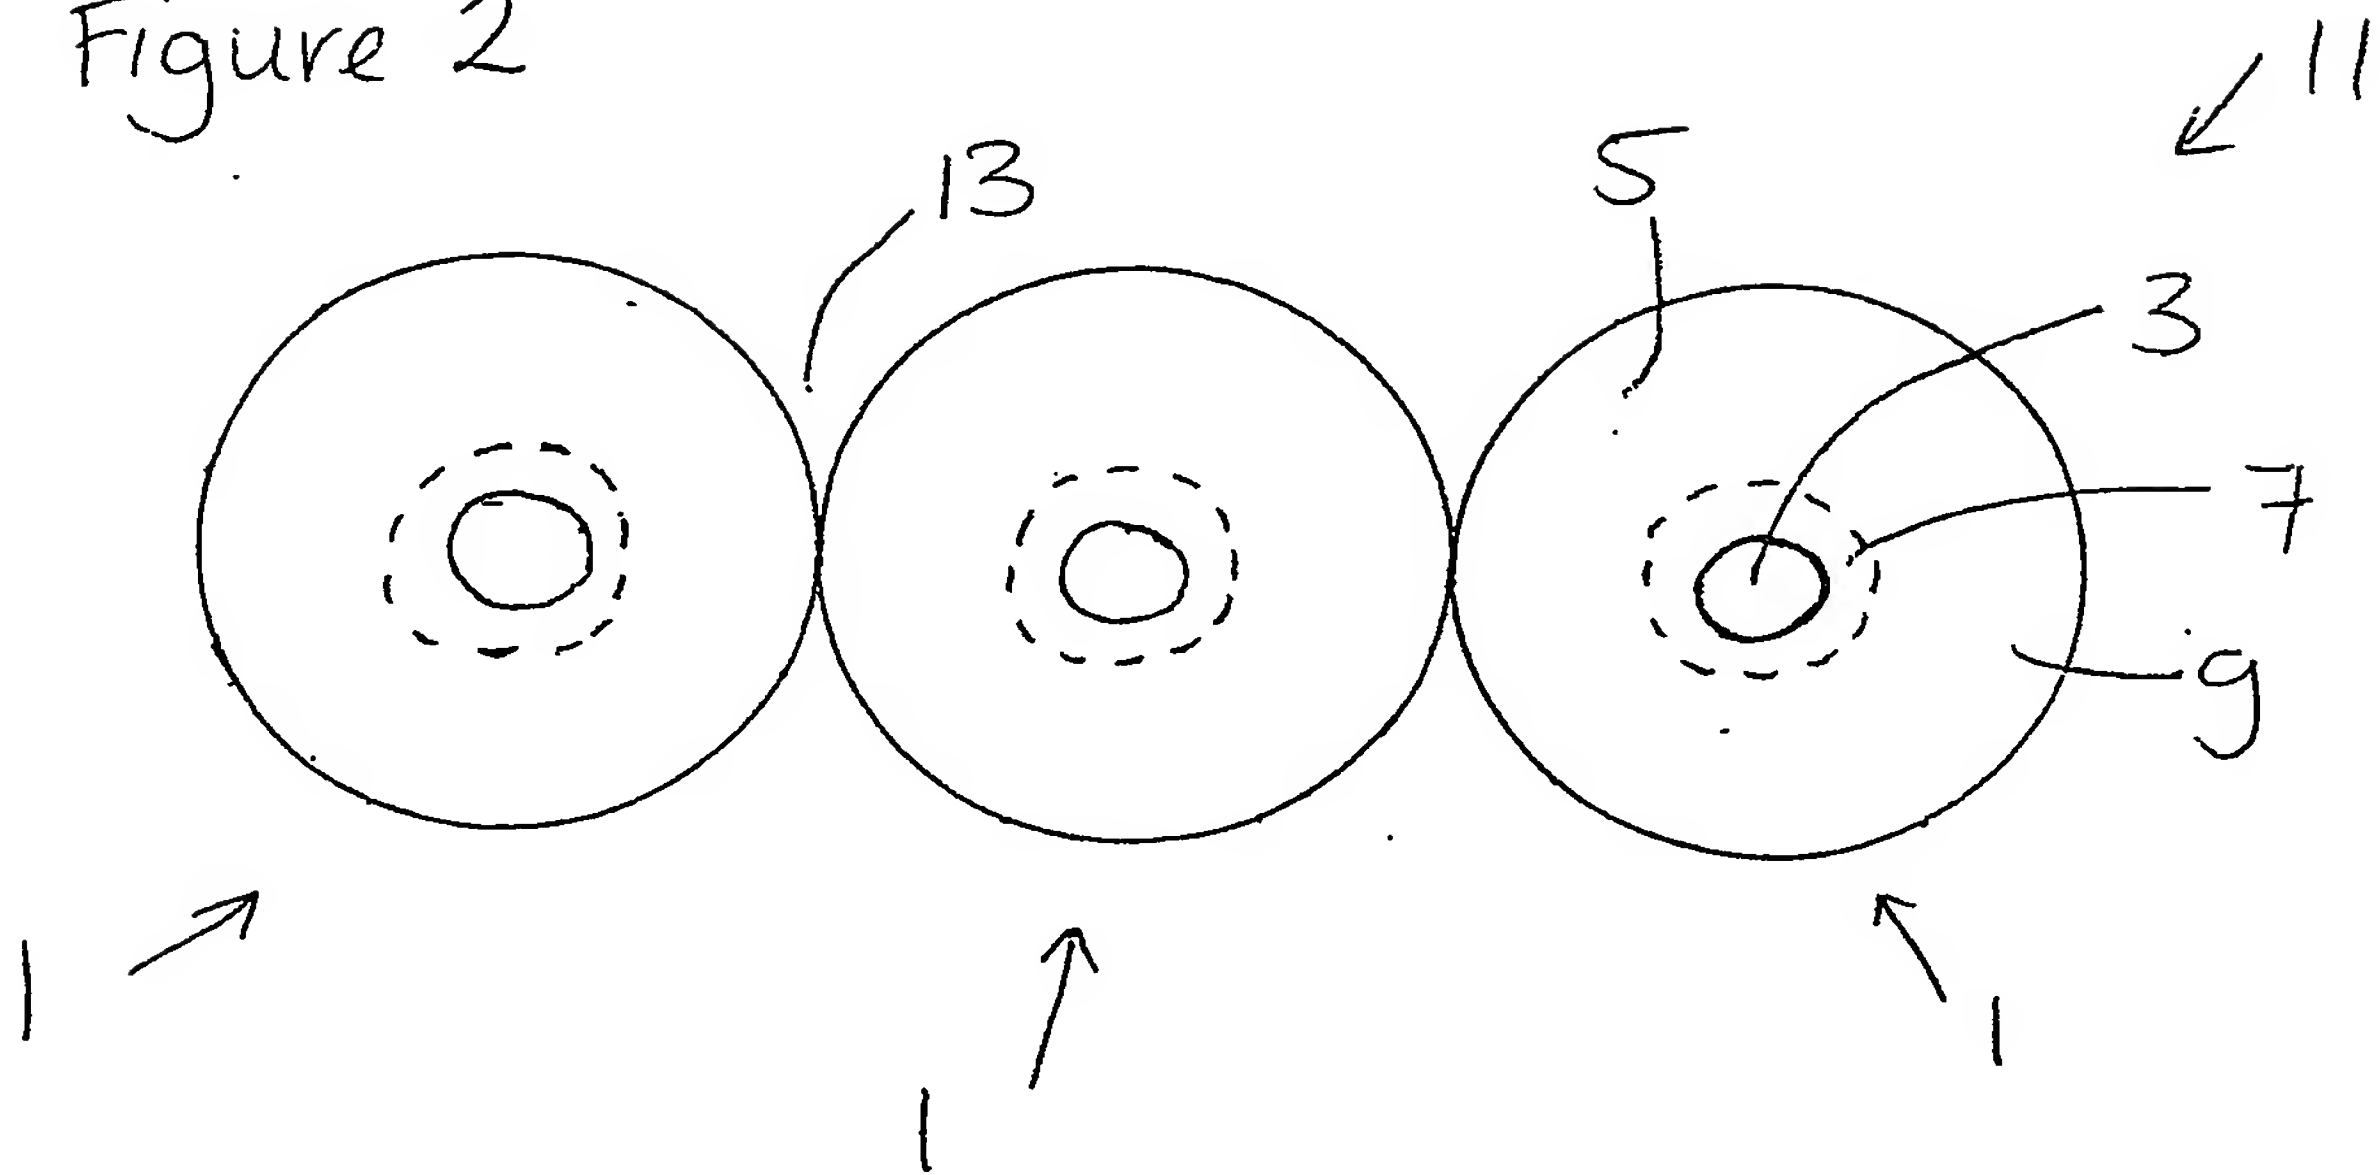


Figure 3

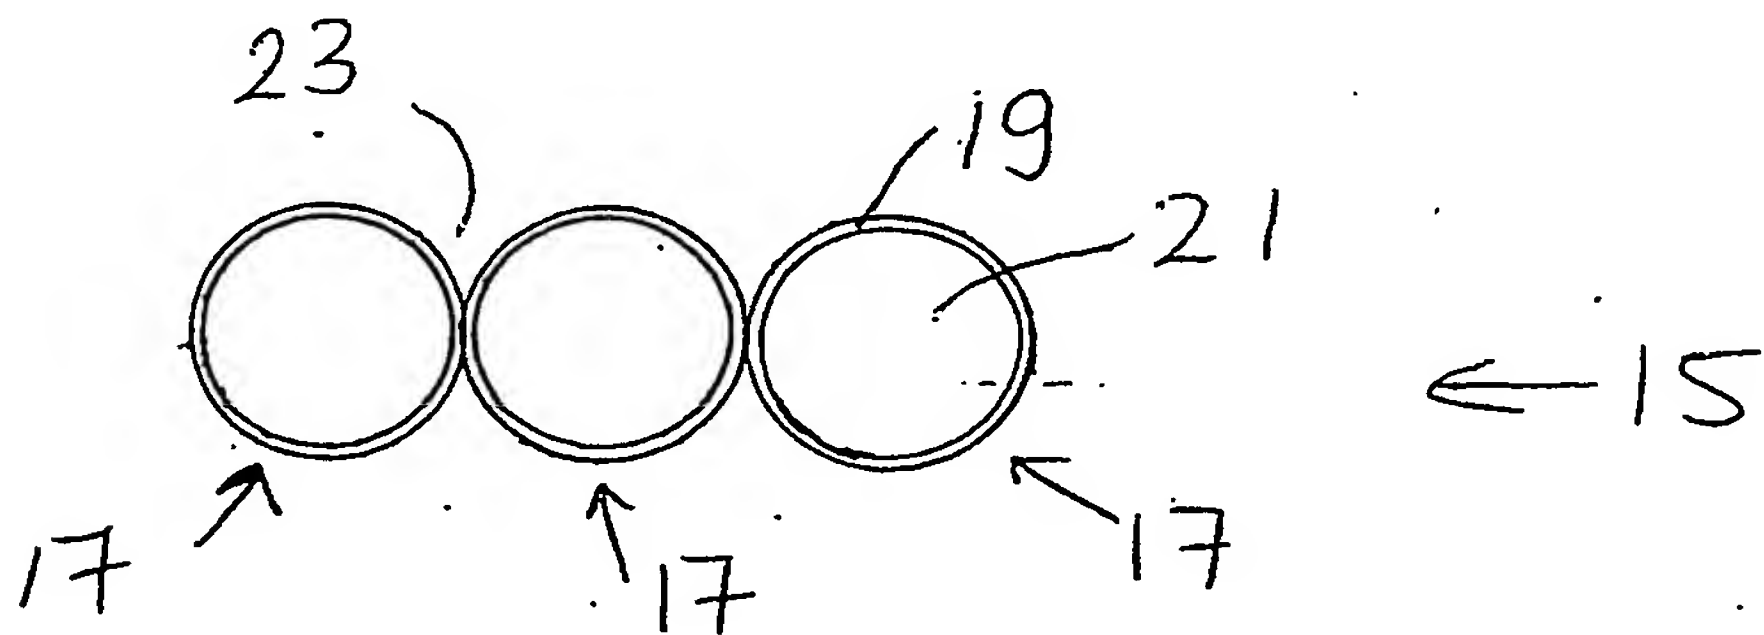


Figure 4

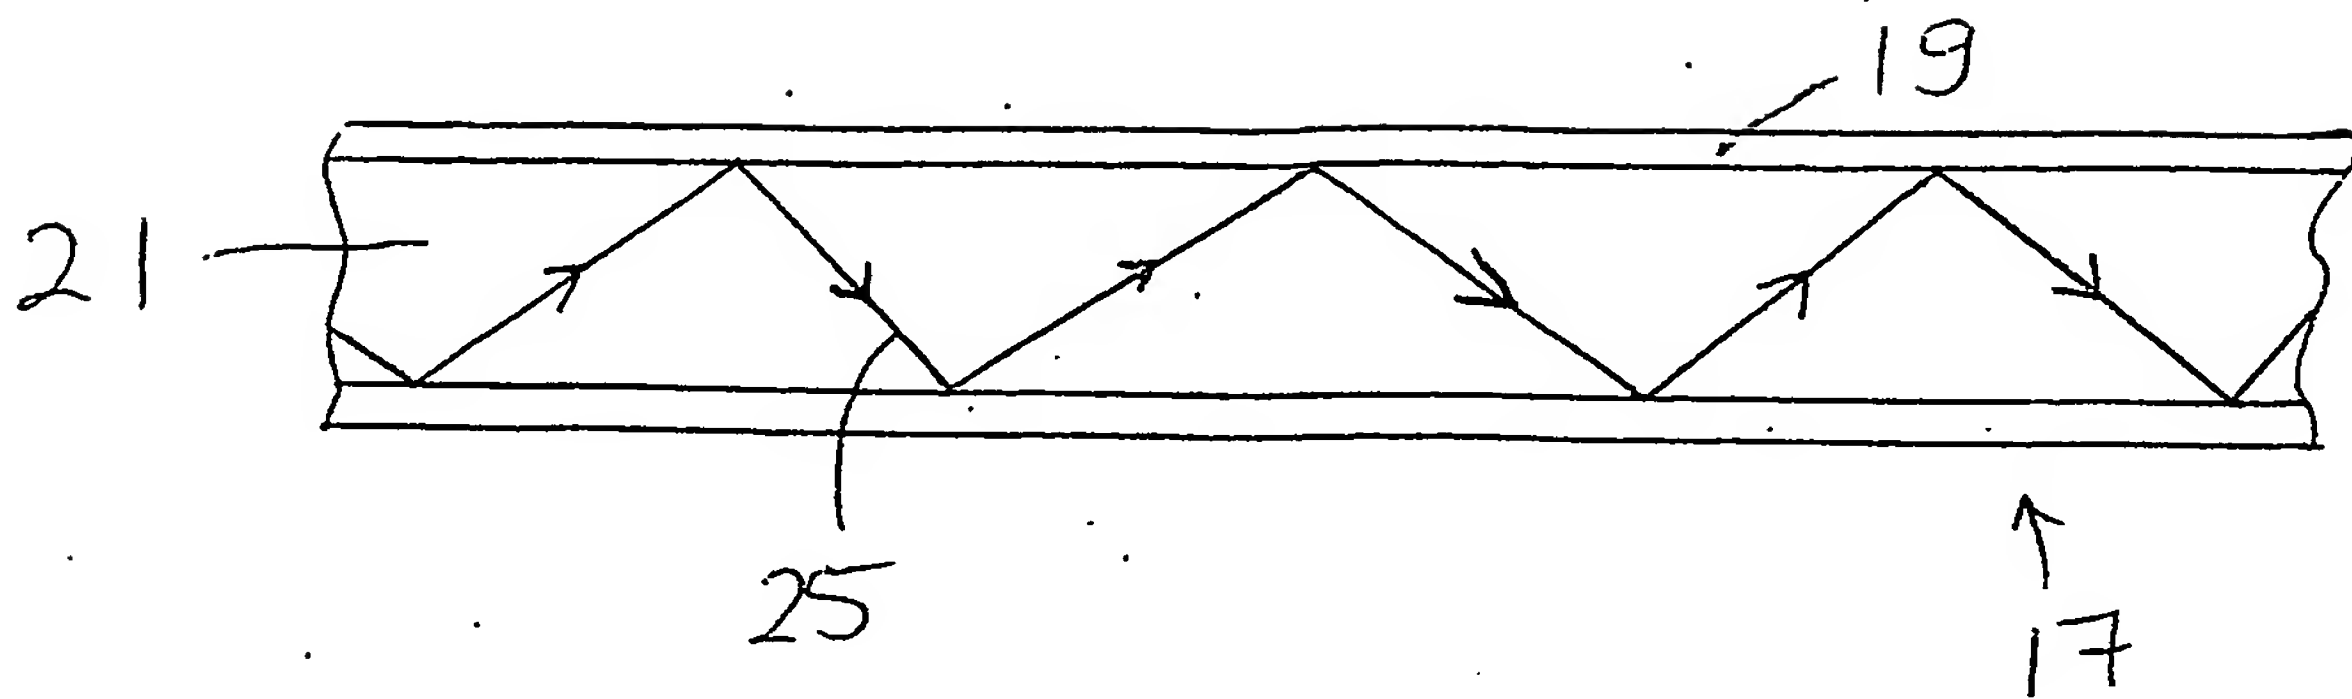


Figure 5

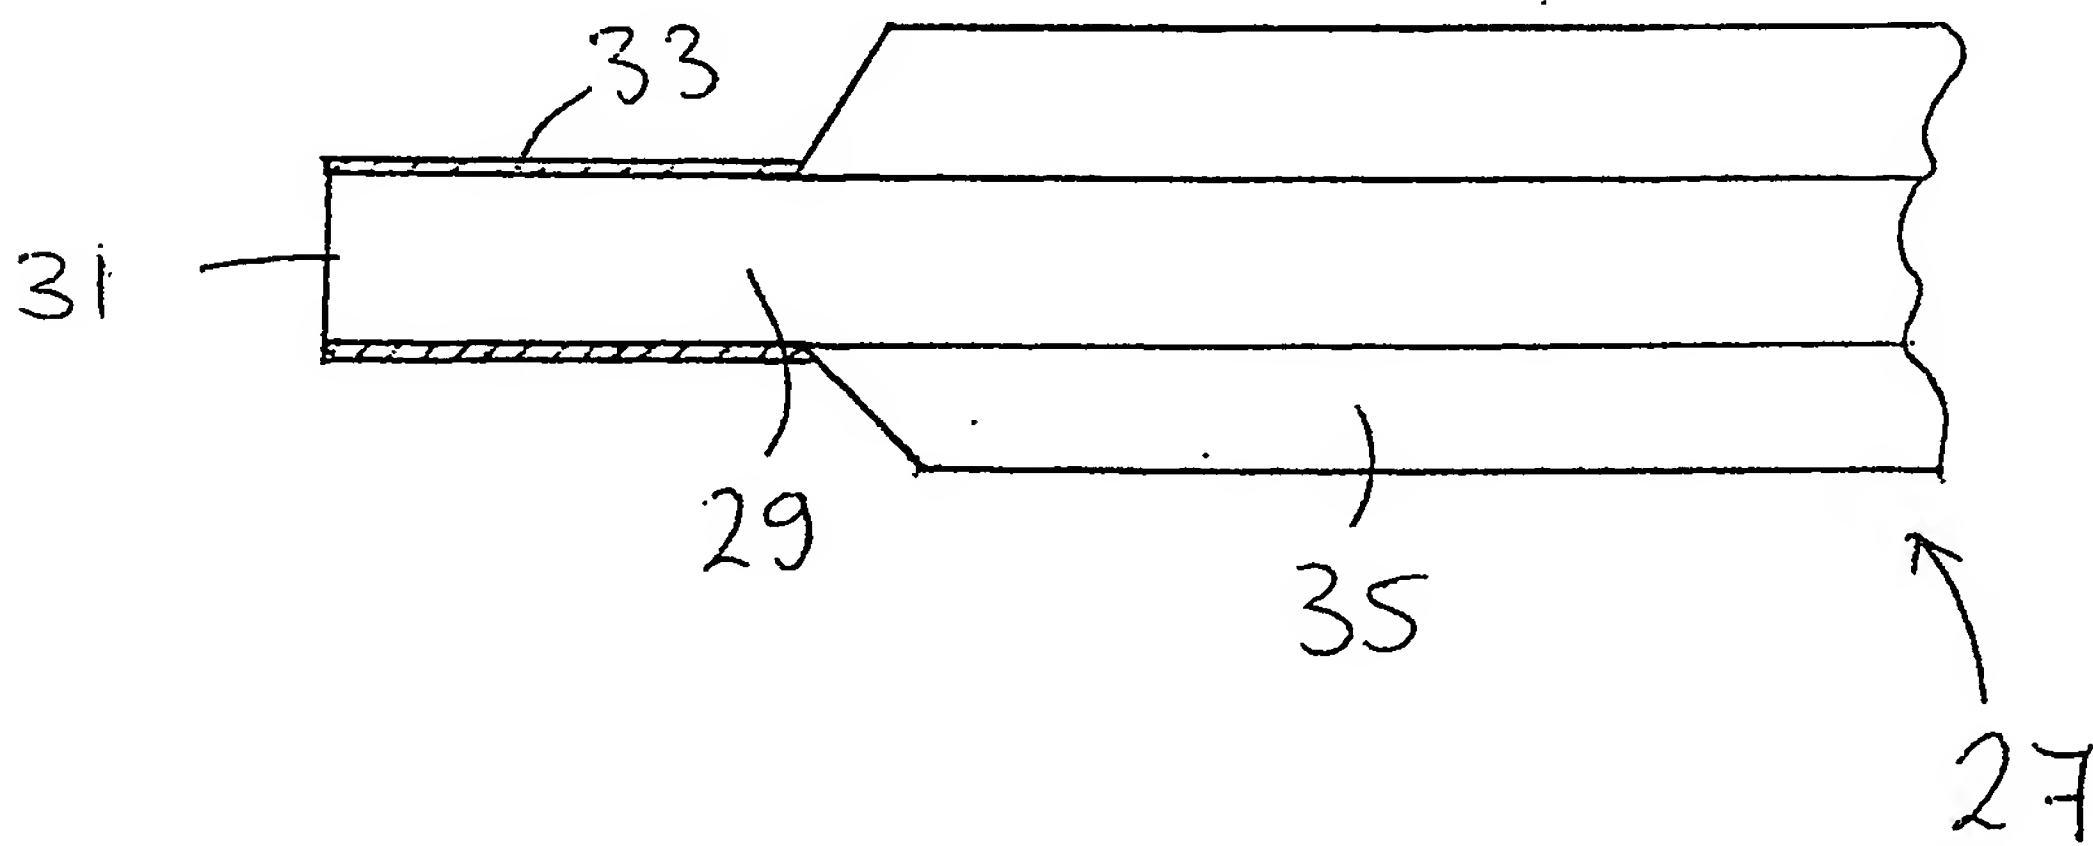


Figure 6

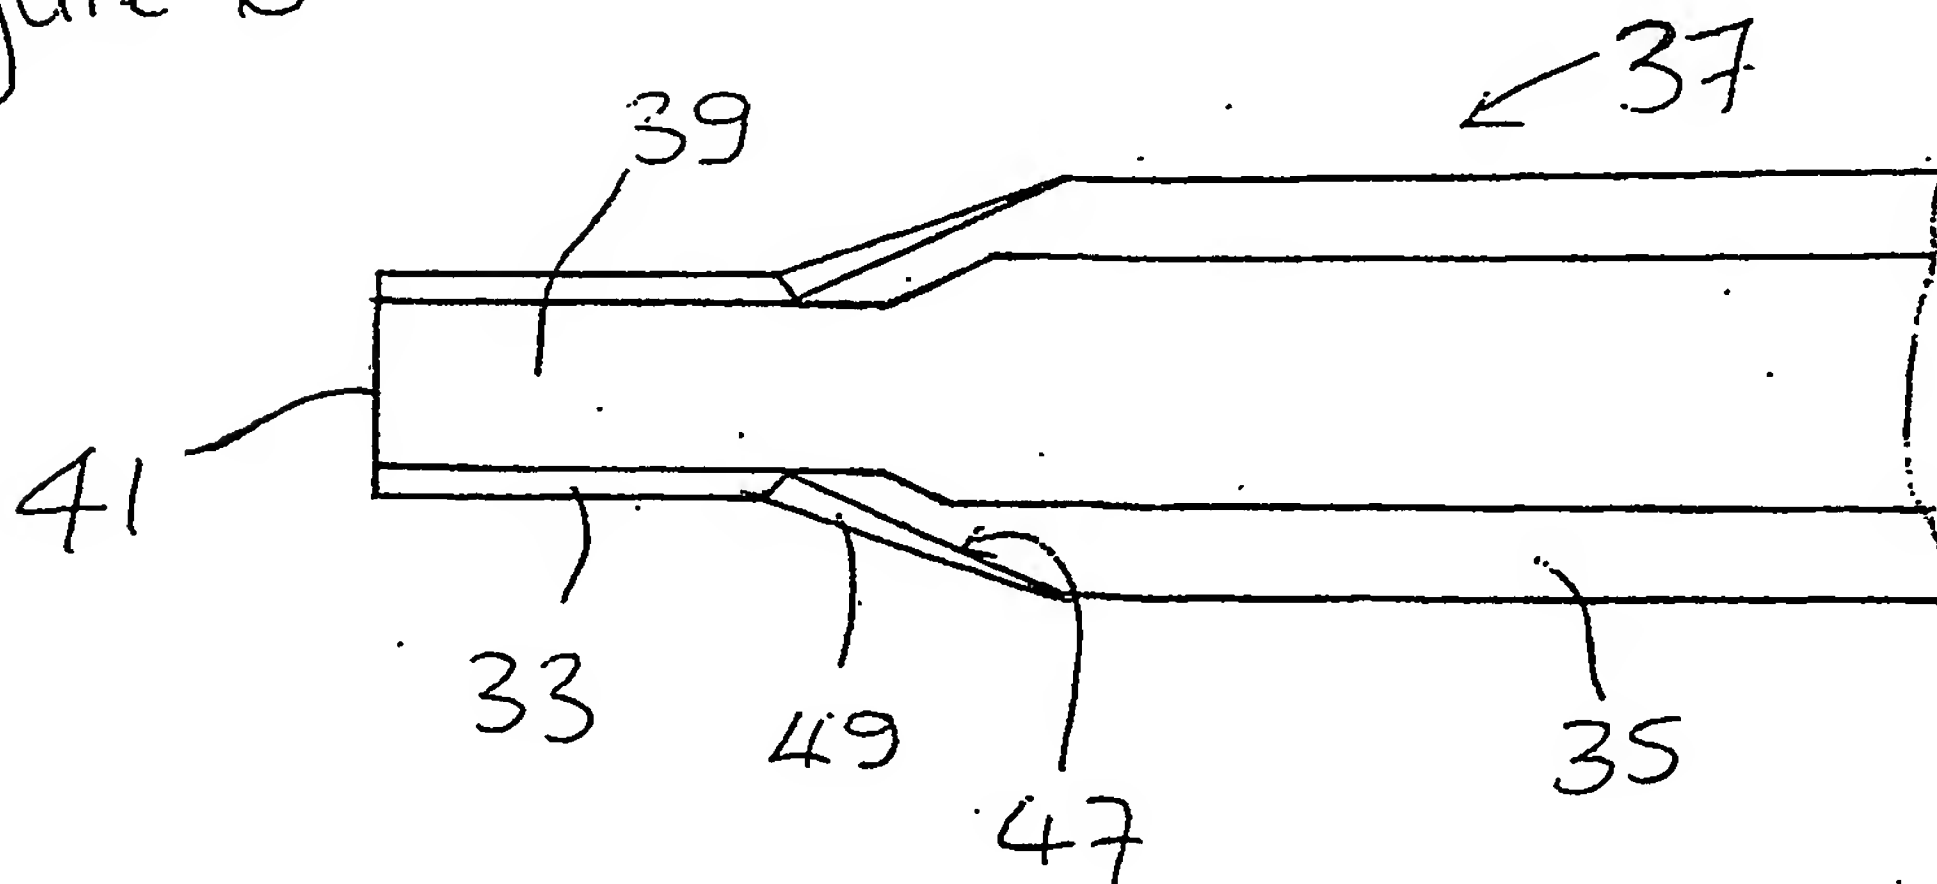


Figure 7


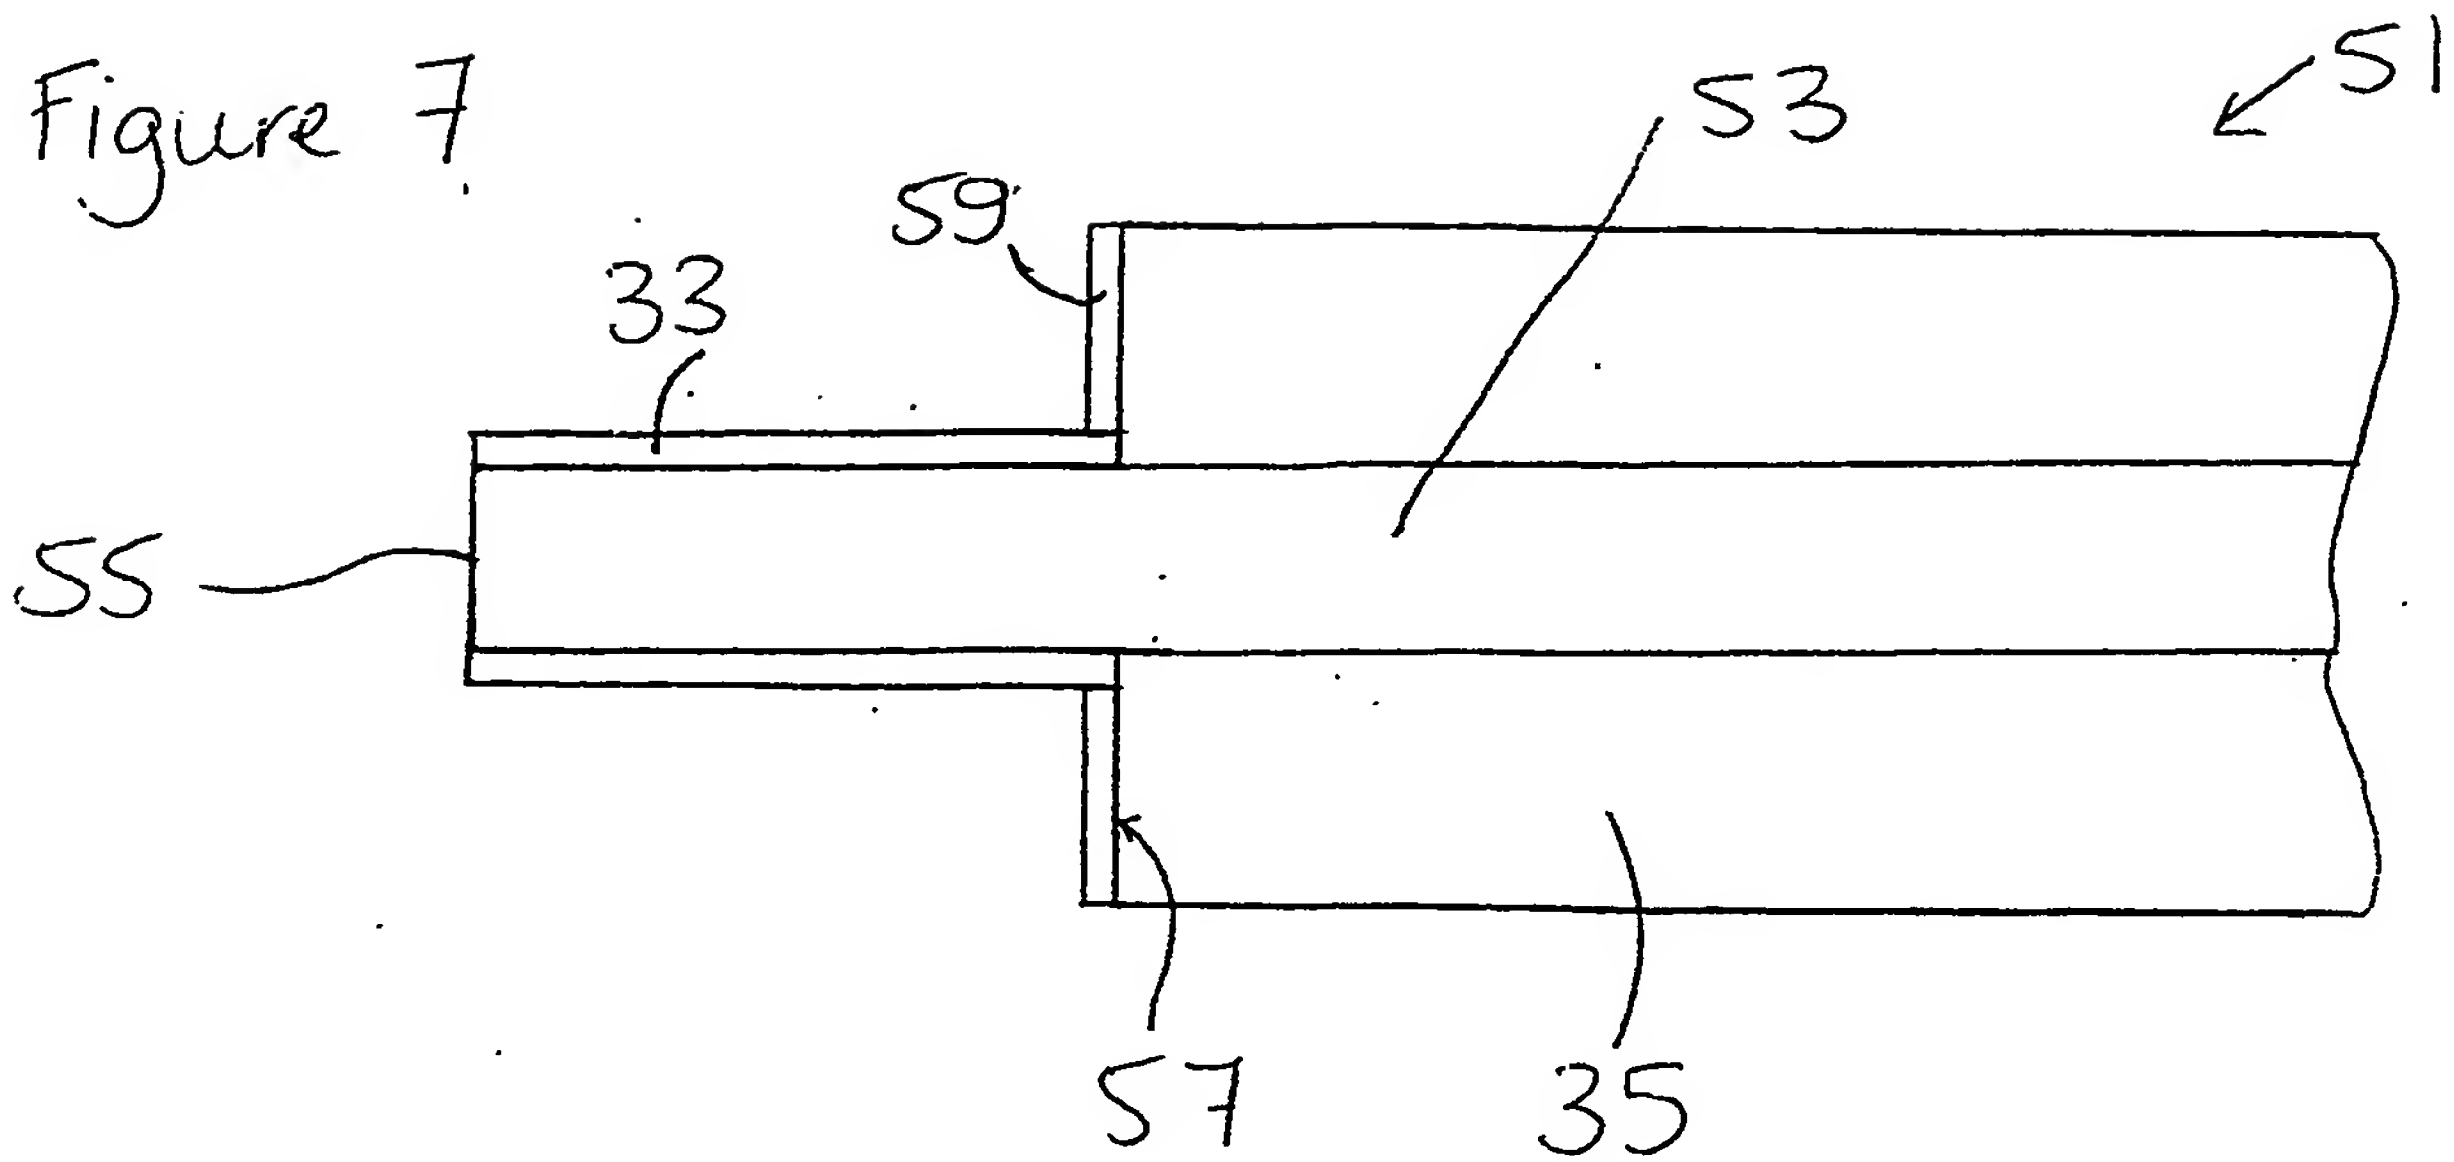


Figure 8

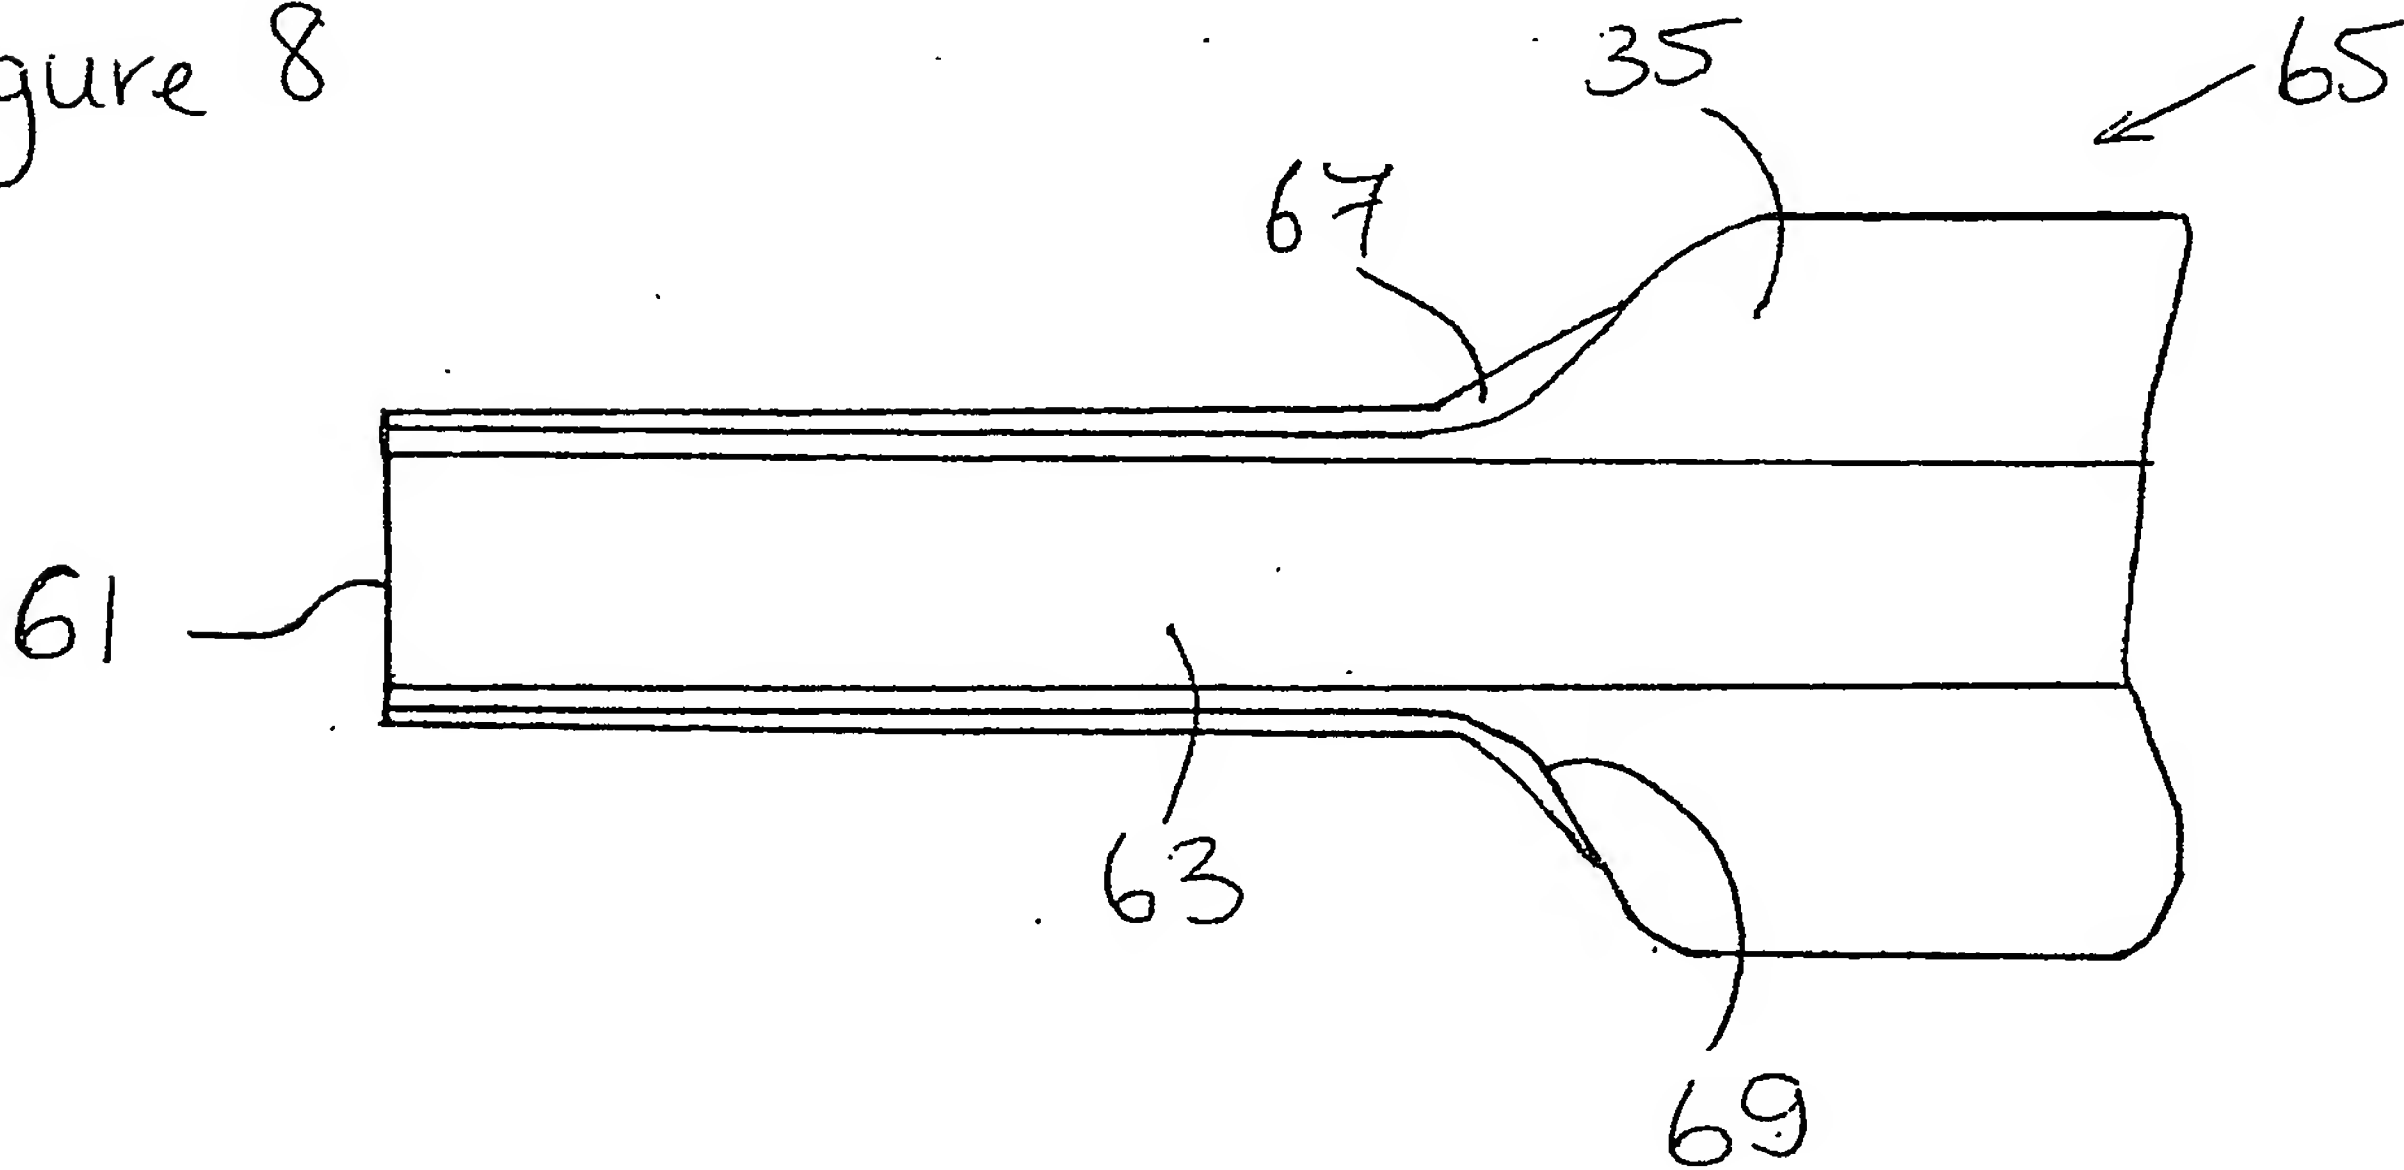

4/4

Figure 9.


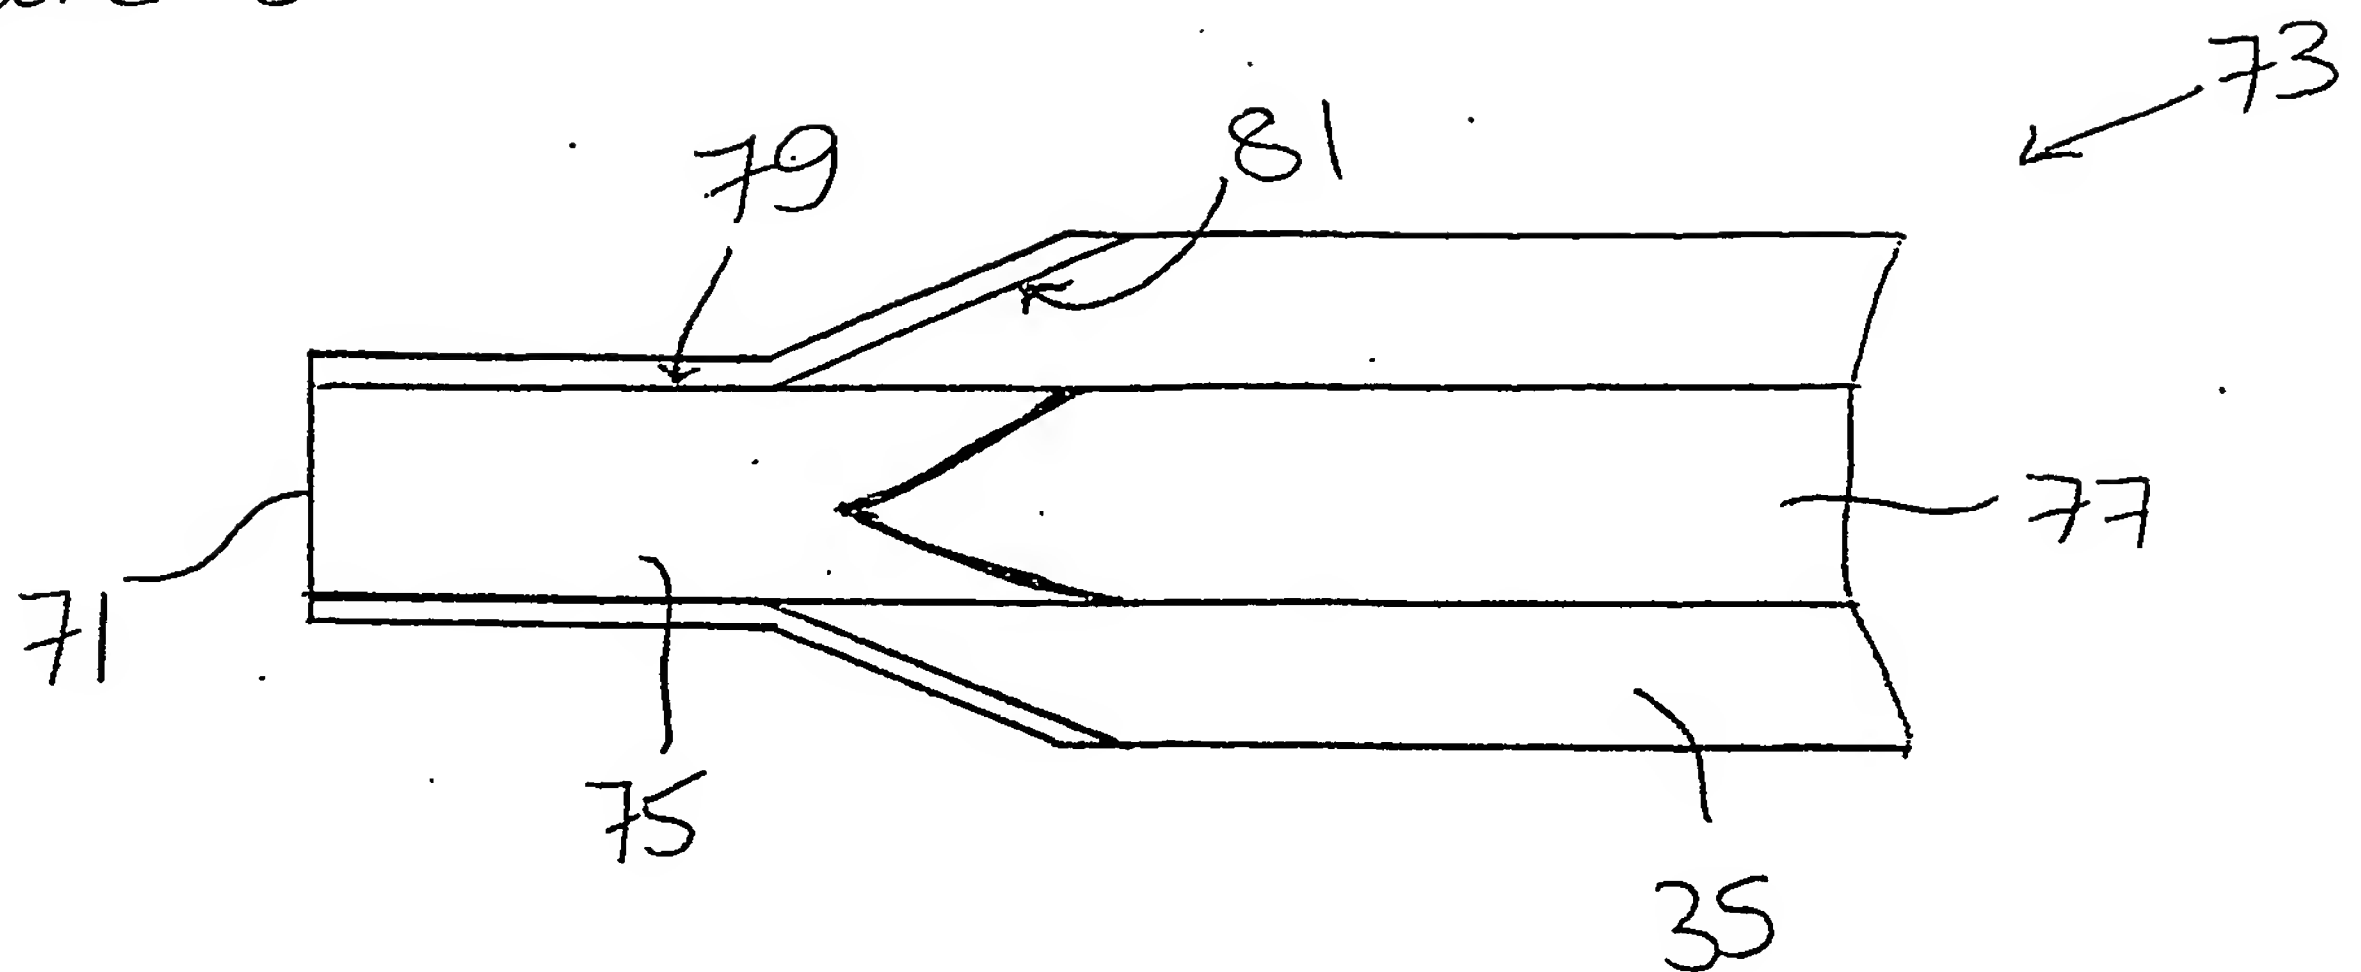


Figure 10

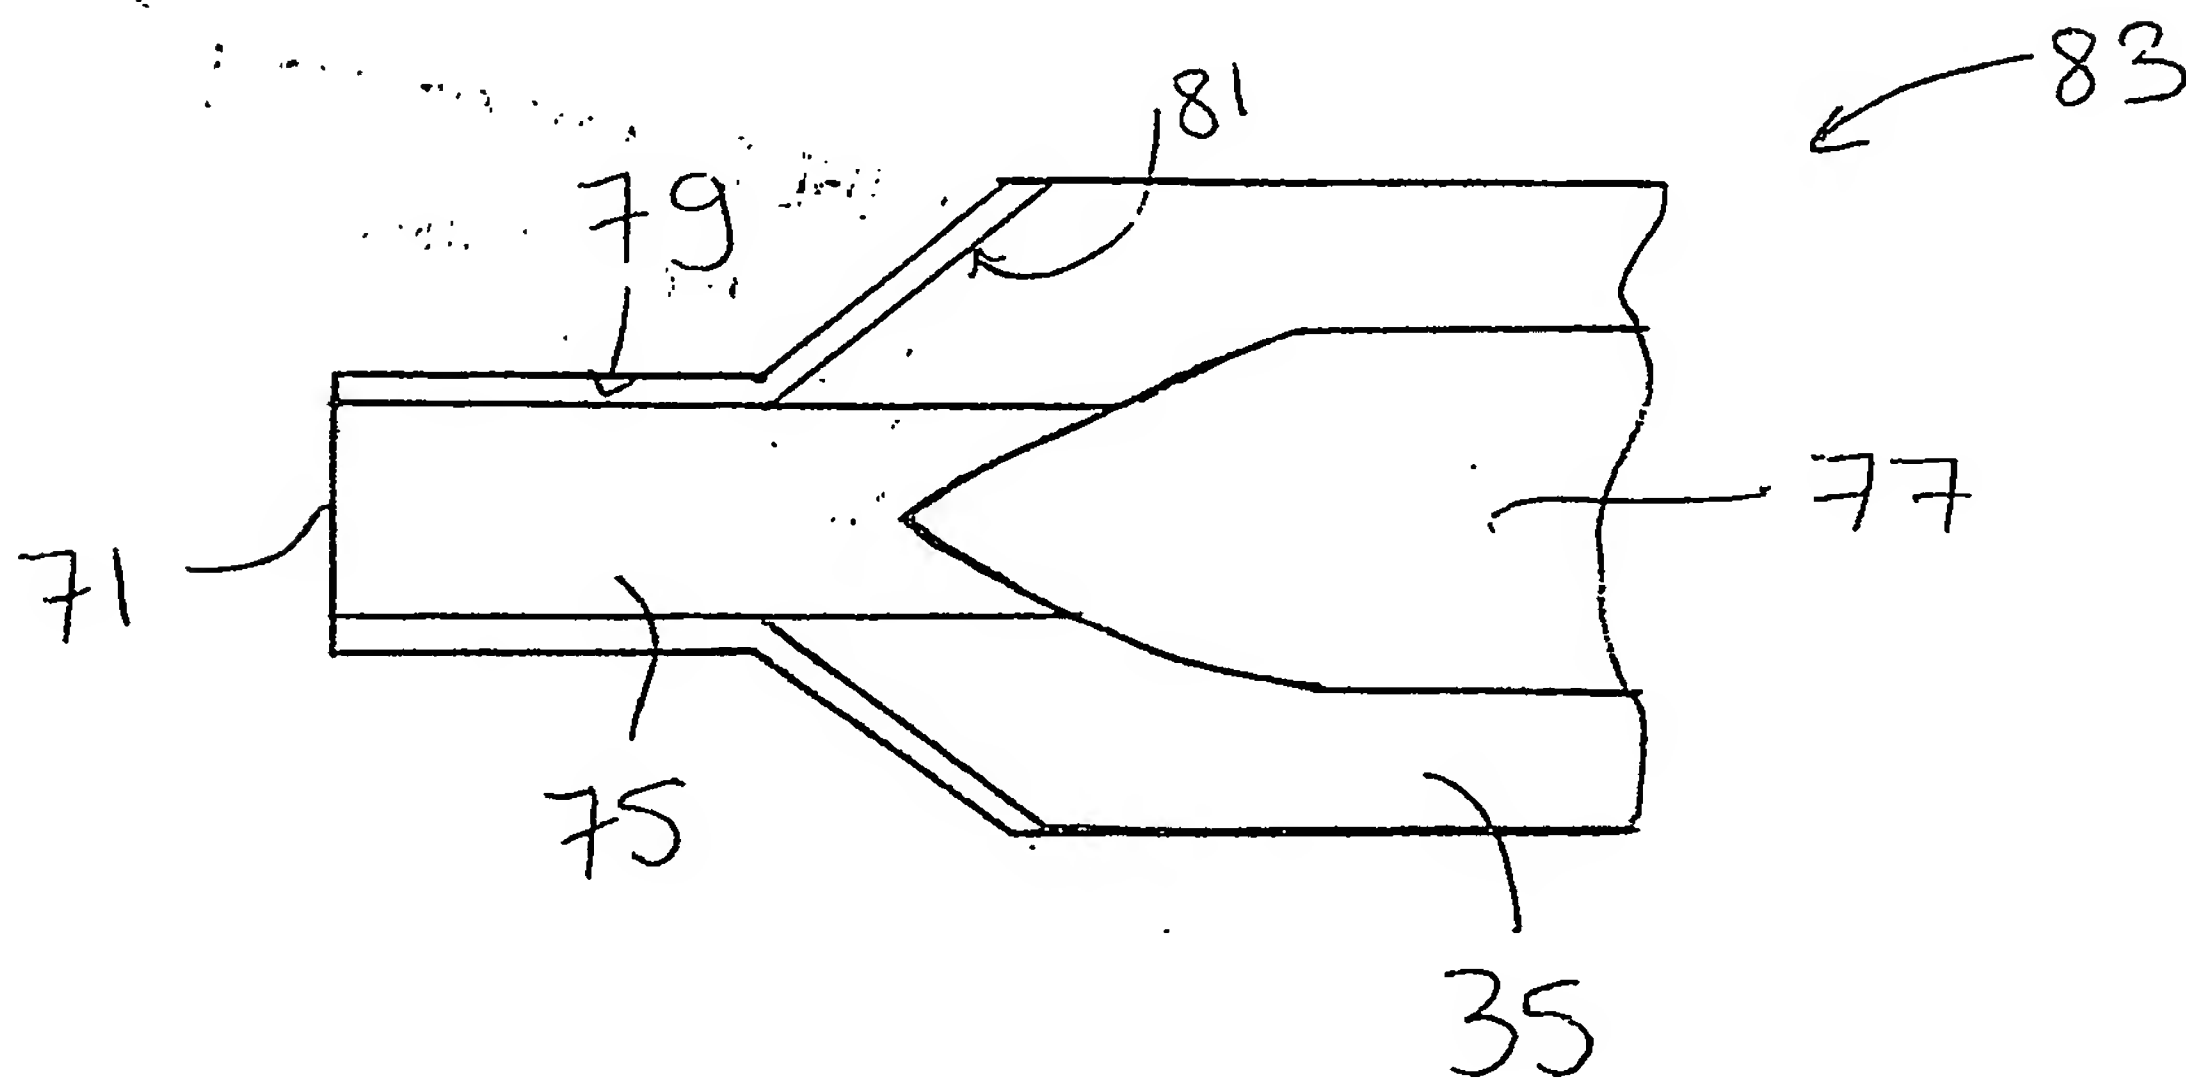

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.